

Features

- Flipstream Technology™.
- Four unique, experiential spray patterns: Coverage™ Kotton™ Komotion™ Kurrent™.
- Sleek contemporary design.
- Adjustable angle for various user heights.
- 1.75 gal/min (6.6 l/min) maximum flow rate.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose



OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.



Color	Code	Description
-------	------	-------------



CP Polished Chrome



BN Vibrant® Brushed Nickel

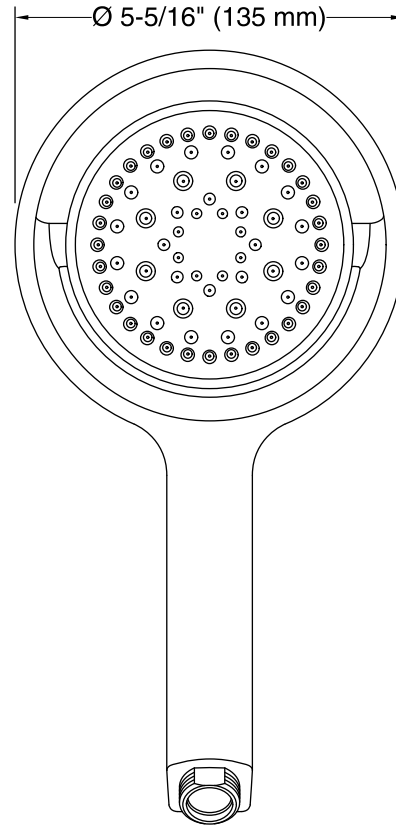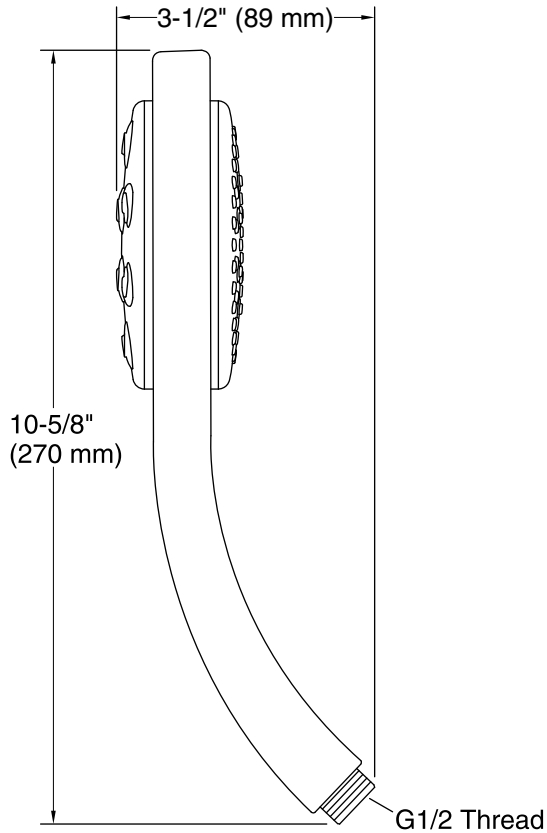

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.