



Features

- 6 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting massage intensity.
- Two sets of 10 backjets target the lower back and shoulders to relieve tension and encourage deep breathing.
- 8 effervescence ports deliver gentle, caressing bubbles.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Built-in heater.
- Remote control.
- Spacious design accommodates up to two bathers.
- Two distinct bathing wells and a cool-off area allow you to create your own experience.
- Two pillows provided for added comfort.

Material

- Acrylic

Hydrotherapy

- Whirlpool
- Backjets
- Effervescence
- Chromatherapy

Installation

- Drop-in or under-mount.

Additional Hydrotherapy Options

- Whirlpool - K-1111-H2
- Whirlpool + Effervescence - K-1111-VLN

Required Products/Accessories

K-9696 Whirlpool 6-Jet Trim Kit

Recommended Products/Accessories

K-588 Under-Mount Installation Kit
K-1601 Bath/Whirlpool Footstop
K-7167 Clearflo Bath Drain



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty



KOHLER® Hydrotherapy Components Five-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |

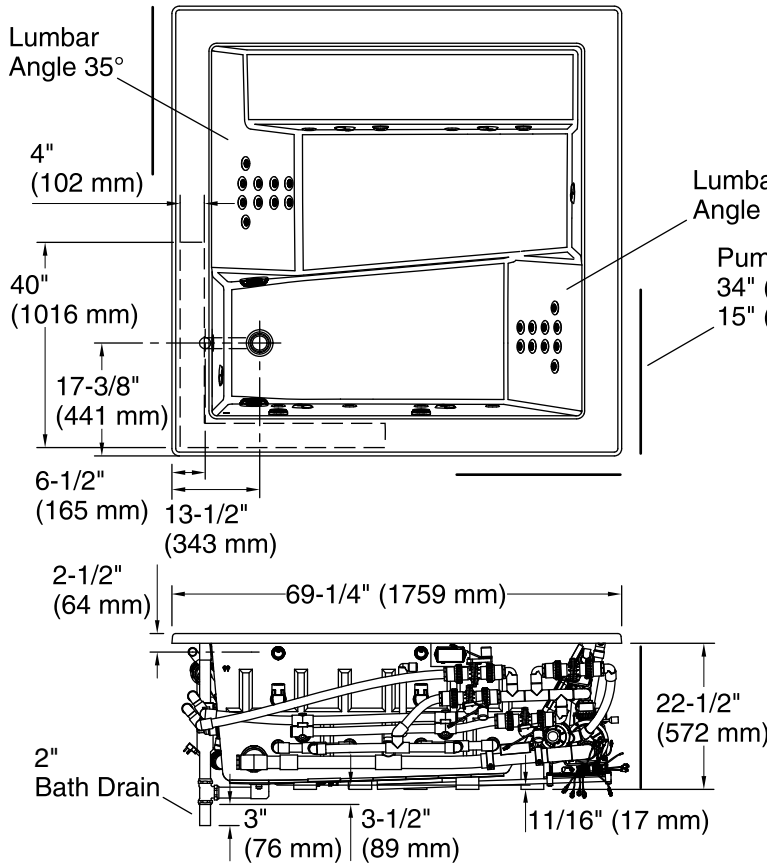


No change in measurements if connected with drain illustrated. (K-7167-AF)

□ Recommended Faucet Location

Lumbar Angle 29°

Pump/Control Access
34" (864 mm) W x
15" (381 mm) H Min (3 required)

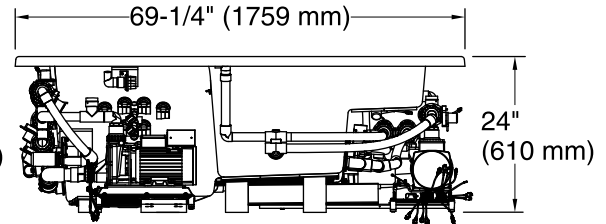

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 220-240 V, 20 A, 50/60 Hz
Pump, Heater: 220-240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Corner, Drop-in, Under-mount
Drain location: End
Basin area, bottom: 45" x 43" (1143 mm x 1092 mm)
Basin area, top: 57" x 57" (1448 mm x 1448 mm)
Weight: 340 lbs (154.2 kg)
Minimum floor load: 54 lbs/ft² (263.7 kg/m²)
Water depth: 19-1/2" (495 mm)
Water capacity: 170 gal (643.5 L)
Cutout: Drop-in, 68" x 68" (1727 mm x 1727 mm)
Electrical component rating: Pump: 220-240 V, 11 A, 50/60 Hz
Heater: 220-240 V, 6.25 A, 50/60 Hz
Pump: 220-240 V, 11 A, 50/60 Hz
Heater: 220-240 V, 6.25 A, 50/60 Hz

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.