

Saile® Dual Flush Compact Toilet K-3564

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Top-mount two-button flush offers a choice of .8 or 1.6 gallons per flush (gpf).
- Skirted trapway simplifies cleaning.
- Saile® Quiet-Close™ seat with Quick-Release™ functionality allows seat to close quietly and quickly unlatch from the toilet for easy removal and convenient cleaning.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- Standard 12-inch rough-in.
- Supply line not included.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.
- This product meets water savings requirements for California Energy Commission (CEC), CALGreen, and Colorado SB 14-103.

Recommended Accessories

K-9384 Dual-flush Actuator 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Components

Product includes:

K-4748 Saile® Quiet-Close™ Elongated Toilet Seat Additional included component/s: Tank cover, Dual flush push buttons, Installation kit, Installation template, and Tank accessory pack.





Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond






KOHLER®

Saile®

Dual Flush Compact Toilet K-3564

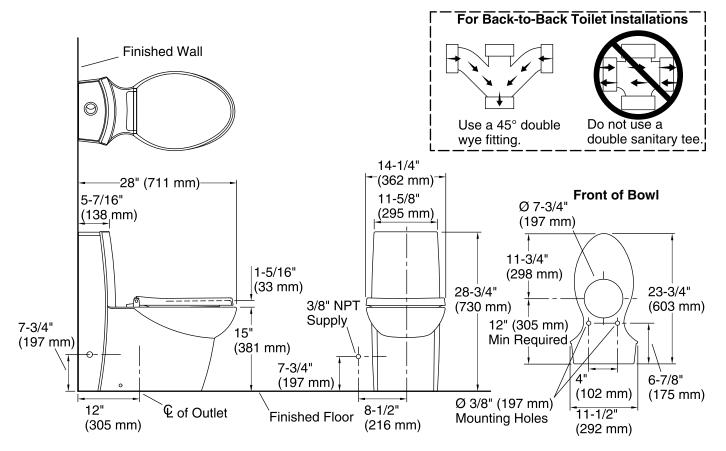

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Wall-mount
Bowl shape: Compact Elongated front

Seat hinge type: Quick-Release™, Quick-Attach®

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 0.8 gpf (3 lpf)

Water surface size: 4-1/8" x 5-1/8" (105 mm x 130 mm)

Rough-in: 12

Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

