



Catalogue :

BLAST CHILLERS AND FREEZERS

Chapter :

ATA BLAST CHILLER & FREEZER

Article :

ATA-061 230V 1N 50Hz

Code:

19018754

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	900,00	995,00
Depth	mm	935,00	974,00
Height	mm	1.105,00	1.334,00
Weight	kg	120,00	125,00
Volume	m3	0,93	1,29
<u>ELECTRICITY</u>		230V	50Hz
	Power		1,60 kW
Connections	230 V. 1+N+T	2X1,5+T - 10 A	
	230 V. III+T	3 X 2,5 + T - 20A	
	400 V. III+N+T	4X1,5 + T - 16 A	
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			R-404A
	Refrigeration power		0,990
	Climat class	3	
<u>SOUND LEVEL</u>			< 65,00 db
<u>CERTIFICATES</u>	SGS-2103-0906-1		
<u>INSTALLATION - CONNECTIONS</u>			Ø
	▶ ELECTRICITY	SI	
	▶ DRAIN		38

DESCRIPTION

COMPACT BLAST CHILLER, ATA-061

SPECIFICATIONS

Mixed models, for chiller blasting (+3 °C) or freezing cycles (-18 °C).

There two working options both for chiller blasting and freezing:

- Power cycle: for over 2 cm thick compact products.

- Soft cycle: for less than 2 cm thick or low density products. The

cycle is run in two programmed stages. The soft cycle prevents frost on the product.

Cycle duration:

- Refrigerating cycle: 90 minutes.

- Freezing cycle: 240 minutes.

Electronic timer and temperature sensor.

The cycles can be controlled by time or by temperature according to the reading of the temperature sensor inside the product (time control is automatically applied when no probe is used).

When the refrigerating cycle is over, the equipment works as a refrigerated cabinet, and the temperature remains between +2 and +4 °C, or as a freezer, with temperatures under -18 °C.

Hermetically sealed compressor with ventilated condenser.

R-404A ecological cooling (CFC free).

60 mm thick injected polyurethane isolation.

40 kg density. CFC free.

Copper piping and aluminium flaps evaporator.

Forced draught cooling system.

Automatic evaporation of defrosting water.

Inner tray slides included.

Capacity: 6 GN-1/1

Production Kg/cycle of refrigeration: 18 Kg

Production Kg/cycle of freezing: 12 Kg

Electric power: 1600 W

Cooling power: 990 W

Dimensions: 900x935x1105 mm






Catalogue :
BLAST CHILLERS AND FREEZERS

Chapter :
ATA BLAST CHILLER & FREEZER

Article :
ATA-061 230V 1N 50Hz

Code :
19018754

SCHEMA - DIMENSIONS

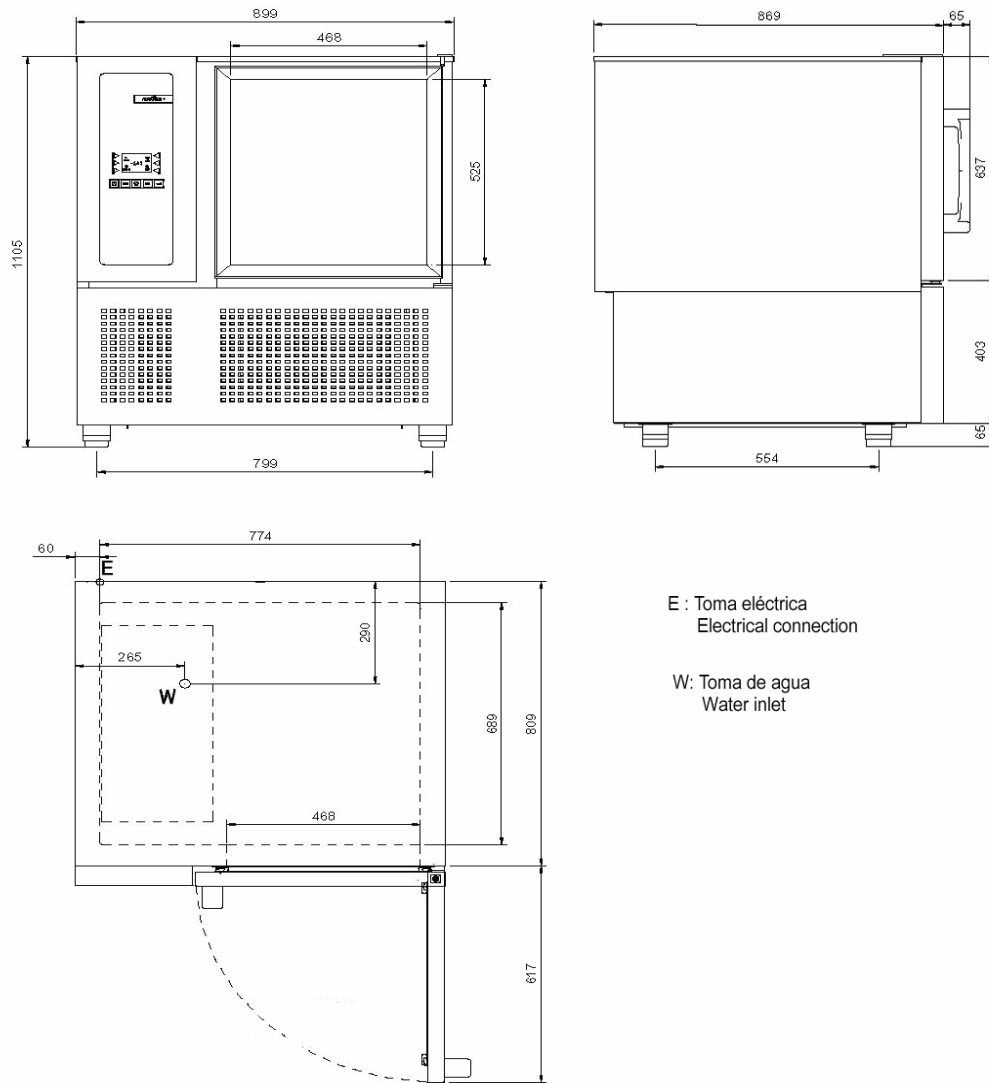

E : Toma eléctrica
 Electrical connection

W: Toma de agua
 Water inlet