

### Features

- One-piece, self-contained ceramic disc joystick valve actuation allows both volume and temperature control.
- Single-handle.
- Flexible connections for easy installation.
- 6-3/8" (162 mm) spout reach.
- Stationary spout.
- Touch-activated drain with tailpiece.
- Lower flow aerator options are available (refer to the Kohler Price Book).
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

### Material

- Brass construction.

### Installation

- Single-hole mounting.



### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®






California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze

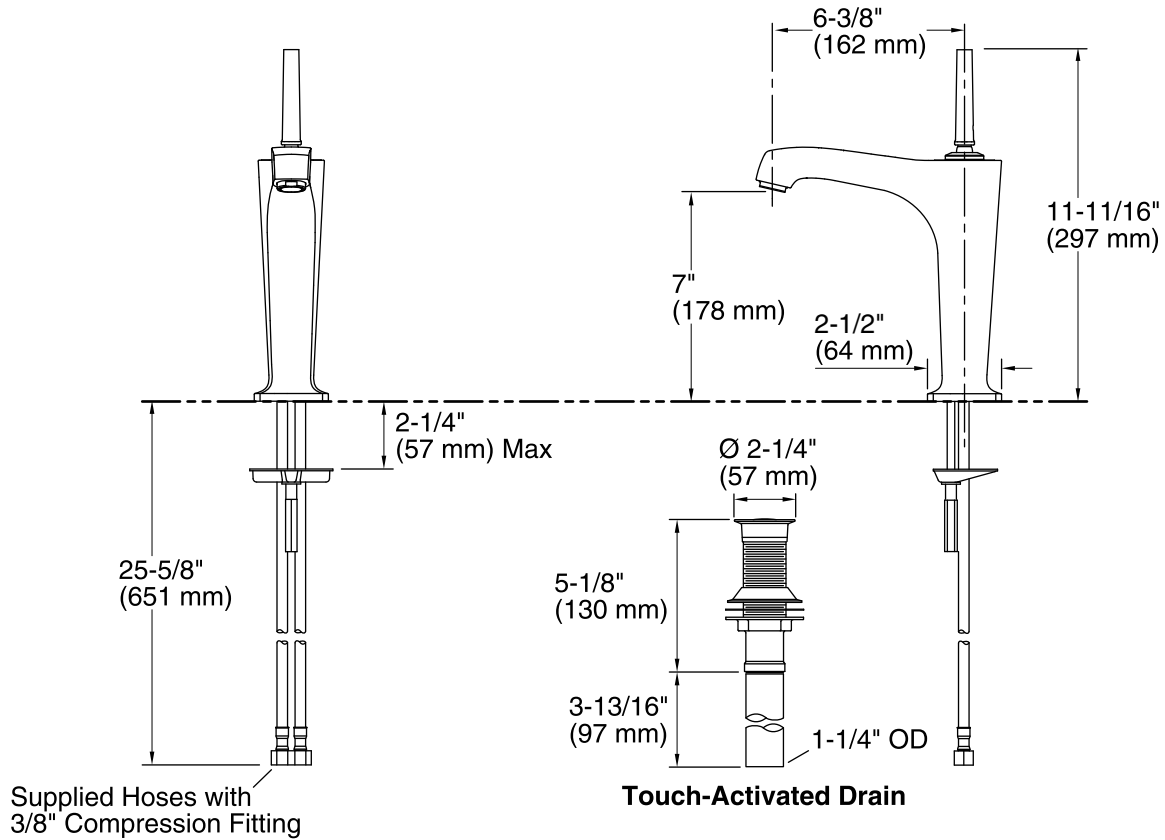

**Technical Information**

All product dimensions are nominal.

**Faucet:**

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain tailpiece included: Yes

**Spout:**

Spout reach: 5-3/8" (137 mm)

**Notes**

Install this product according to the installation guide.