Features

- Single cylinder handle allows for both volume and temperature control
- 4" (102 mm) spout reach.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Includes metal pop-up drain with 1-1/4" tailpiece.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Toobi faucets, accessories, and showering components to complete your bathroom.
- Premium Metal Construction
- For single-hole installation.
- Pre-attached flexible supply lines simplify installation
- Single-hole mounting
- 1.2 gpm (gallons per minute) flow rate.
- Three color options included for the bathroom sink spout outlet - white, green and black
- Flexible connections for easy installation
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance
- Brass construction ensures durability and reliability
- KOHLER finishes resist corrosion and tarnishing.
- Coordinates with Toobi accessories

Installation

- Bath- or deck-mount.

ADA CSA B651

WaterSense
Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
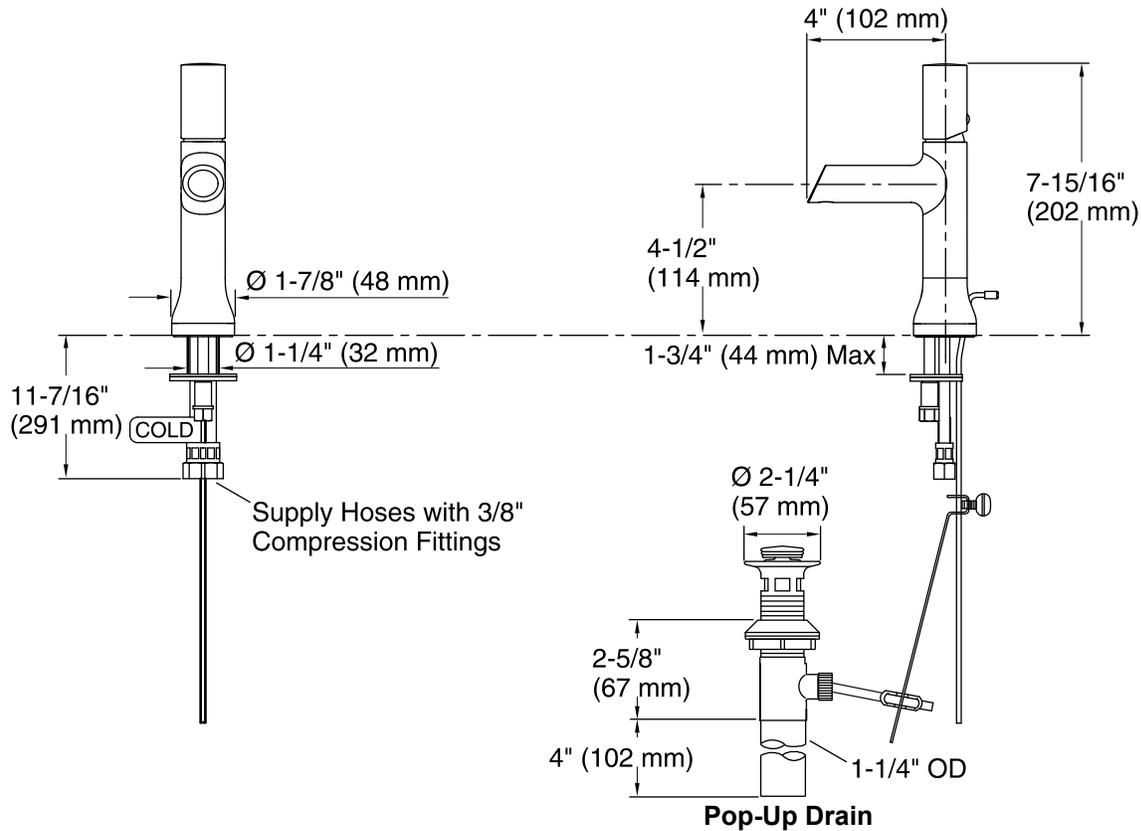California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
5-5-2019 08:11 - US/CA/MX

THE BOLD LOOK
OF KOHLER®

4" (102 mm)

Ø 1-7/8" (48 mm)

Ø 1-1/4" (32 mm)

7-15/16" (202 mm)

4-1/2" (114 mm)

11-7/16" (291 mm)

COLD

1-3/4" (44 mm) Max

Supply Hoses with 3/8" Compression Fittings

Ø 2-1/4" (57 mm)

2-5/8" (67 mm)

4" (102 mm)

1-1/4" OD

Pop-Up Drain

Technical Information
All product dimensions are nominal.

Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Drain tailpiece included:	Yes

Spout:

Spout reach:	4" (102 mm)

Notes
Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
5-5-2019 08:11 - US/CA/MX

THE BOLD LOOK OF KOHLER®