Features

- For use with K-99512 Jacquard®, K-99525 Damask®, and K-99538 Poplin® vanities.
- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Includes 4 electrical outlets (2 switched, 2 always live).
- Appliances can remain plugged in while vanity door is closed.

Material

- Solid wood and veneers.
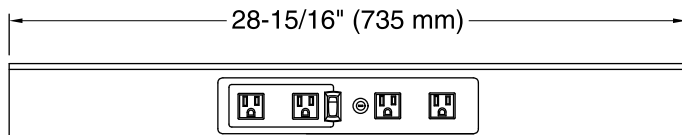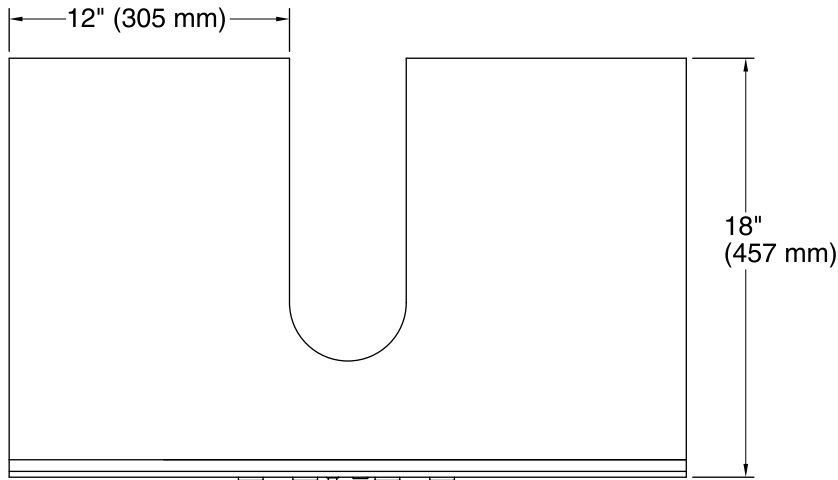
Codes/Standards

EPA TSCA Title VI
CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	1WR	Oxford Maple

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
5-25-2019 11:36 - US/CA

THE BOLD LOOK
OF **KOHLER**®

12" (305 mm)

18"
(457 mm)

28-15/16" (735 mm)

3-1/8"
(79 mm)

Required Electrical Service

One dedicated circuit required, protected with Class A
Ground-Fault Circuit-Interrupter (GFCI). Outside North America,
this device may be known as a Residual Current Device (RCD).

120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation
guide.

Install a Ground-Fault Circuit-Interrupter (GFCI)
outlet prior to installing the vanity.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
5-25-2019 11:36 - US/CA

THE BOLD LOOK
OF KOHLER®