

Features

- Project pack: supplied 12 per case.
- Includes face plate with handle, bath spout, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Includes diverter bath spout with 1/2" copper slip fit connection.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean™ sprayface for easy cleaning.
- Complements the Coralais faucet and accessory collections.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

Installation

- Trim set requires valve to complete installation.

Required Products/Accessories

- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome

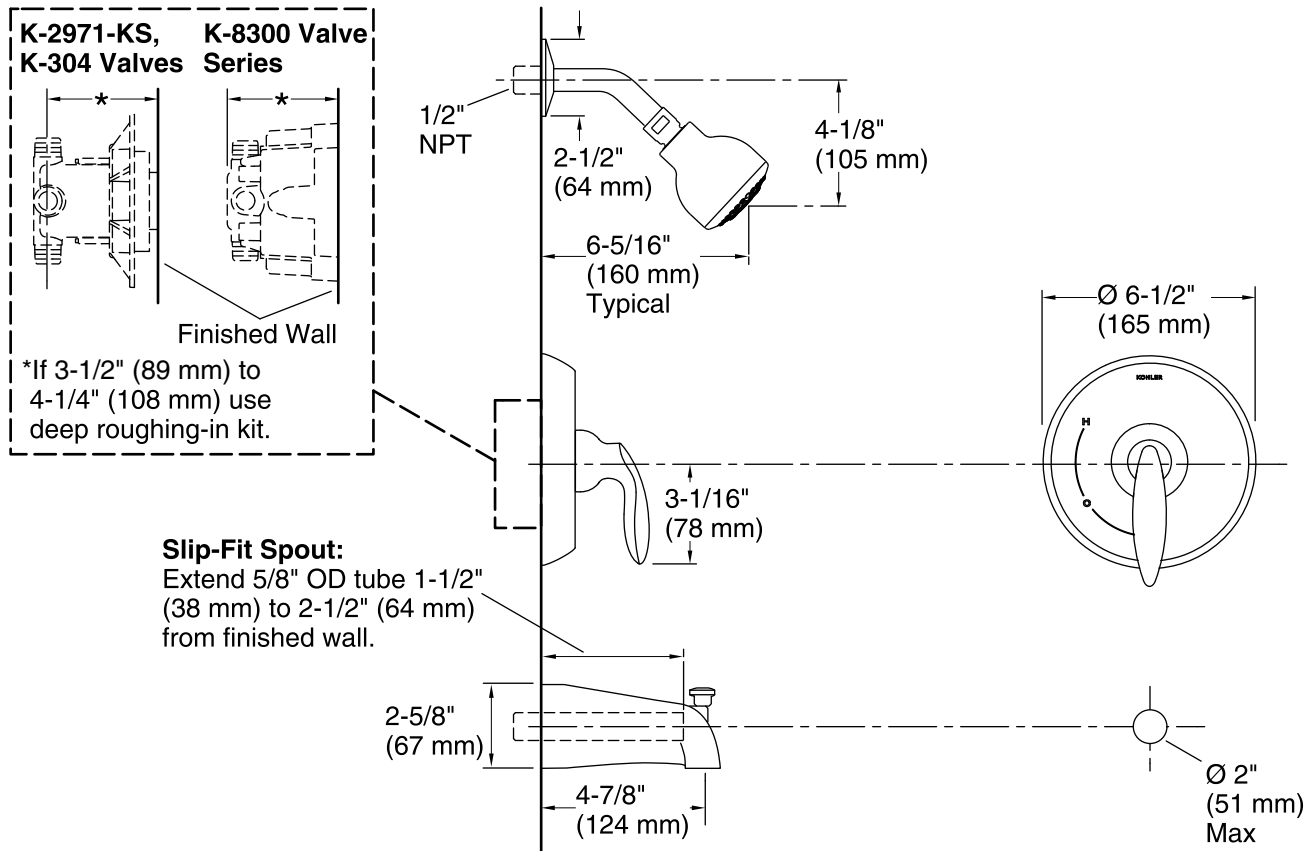

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed. Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout. Elbow must be a 90 degree drop ell that is secured to rigid framing.